


DATA SHEET - CONICAL CONCRETE BUCKET WITH RUBBER HOSE

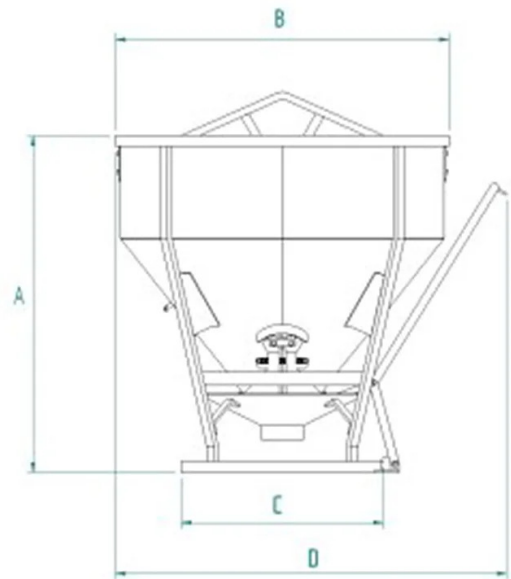

Code	Capacity (kg)	Capacity (L)	Weight (kg)	Dimensions (mm)			
				A	B	C	D
CT-40	1040	400	110	1130	1050	875	1200
CT-50	1300	500	115	1240	1050	875	1200
CT-80	2080	800	180	1490	1250	930	1445
CT-99	2600	1000	195	1670	1250	930	1450
CT-150	3900	1500	250	2170	1250	930	1450

DATA SHEET - CONICAL CONCRETE BUCKET WITH RUBBER HOSE

Concrete buckets




Conical concrete bucket with rubber hose

Conical concrete bucket with central discharge and rubber hose

We are pleased to introduce the model CT conical concrete bucket, featuring a central discharge with a rubber hose and lever-operated opening. The bucket comes complete with a rope and two springs that facilitate the opening and closing of the discharge valve. This configuration provides precise and uniform control of the concrete pour, making the bucket particularly suitable for use on formworks and pillars. The rubber hose is standard with a length of 2 meters and a diameter of 200 mm, but different sizes can be requested upon specific demand. This flexibility allows customization of the bucket according to the specific needs of your project. We offer the CT model in various sizes and capacities, as specified in the table below, and we can further customize it to meet your individual requirements. All our buckets are built and tested according to stringent standards UNI EN ISO 12100, UNI EN 13854, ISO 8686, UNI EN 10027, and UNI EN 10204, ensuring high standards of quality and safety. Each product is accompanied by a metal ID plate, conformity certificate, and operation and maintenance manual for proper management and upkeep over time. Furthermore, all our products are covered by a one-year warranty, in compliance with the European Directive, and are constructed with certified materials to ensure durability and safety, meeting the required quality standards in the construction industry.

Application sectors

 Construction